


EASY **ROLLER**TM

GCL DEPLOYMENT SYSTEM

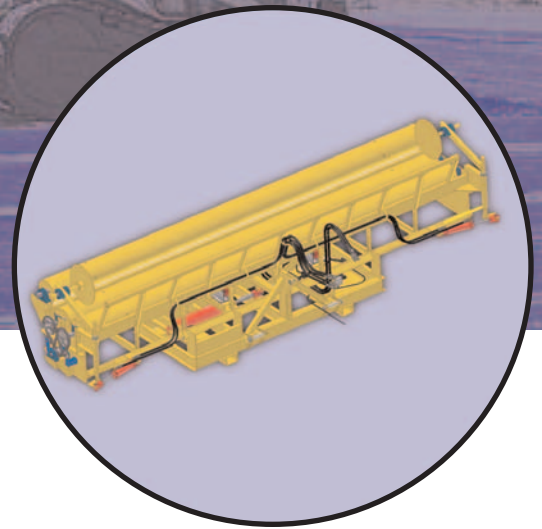

EASY ROLLER

- Technically advanced GCL deployment
- Speeds installation
- Saves money
- Minimizes injuries



HYDRAULICALLY DRIVEN

**TWO COUNTER-ROTATING ROLLERS
CRADLE THE GCL AND ALLOW FOR
RAPID, ACCURATE DEPLOYMENT**

**TWENTY-FOUR (24) INCHES OF SIDE
SHIFT CAPABILITY ENSURE
ACCURATE OVERLAP PLACEMENT**

**START/STOP FEATURE ALLOWS
FOR SIMPLE ROLL TENSIONING
AND WRINKLE REMOVAL**

**GCL REWINDING CAPABILITY USING A
REVERSE OPERATION**

PATENT # 6,786,446



**THE EASY ROLLER™ ATTACHMENT IS DESIGNED TO EASILY CONNECT
TO ANY STANDARD, LATE MODEL TRACTOR THAT MEETS THE FOLLOWING CRITERIA:**

Hitch Type:
Hitch Capacity:
Hydraulic Couplers:

**Three point hitch unit - Category IIIN/III
12,000 lbs minimum**

Three remotes or selective control valves are essential to accommodate six hydraulic lines with self-sealing quick couplers. Power-beyond circuit will be needed for the supply, return, and load sense lines to run the Easy Roller remote control pendant.

Hydraulic System:
Tires:
Tracks:

**Load sensing closed center, pressure/flow compensated system
Duals on front and rear are necessary for flotation and traction
25-inch wide track minimum**



GCL DEPLOYMENT SYSTEM INCREASES PRODUCTIVITY AND SAVES MONEY



ACCELERATES INSTALLATION UP TO THREE TIMES THE NORMAL RATE

Keeping the deployment machinery moving is the key to increased production rates. Up to 45,000 square feet of GCL can be placed per hour. Essential material handling practices include the placement of material stockpile near deployment area and use of an all-terrain, extendable boom fork lift.

- Planning is easier and scheduling more predictable with automation.
- Eliminates long delays caused by improper overlaps and wrinkle removal.
- Accelerates construction with the use of heavy equipment to move and deploy GCL rolls. With proper coordination, saves time by not having to wait for the next roll to arrive at the deployment area.



REDUCES LABOR FORCE

A standard Easy Roller™ installation utilizes only four people: A deployment tractor operator, an attachment operator, a loading fork lift operator, and a laborer to remove bags from the rolls and core tubes from the attachment. When necessary, deployment has been accomplished with as few as three people – the attachment operator performs multiple duties.

- Laborers are no longer needed at the stock pile to assist with core pipe removal and replacement.
- Manual overlap adjustments and struggles with wrinkles are no longer a factor.
- GCL Installation on slopes becomes much less labor intensive.



CREATES A SAFER WORK ENVIRONMENT

- Minimizes potential injuries and costly insurance claims by decreasing worker exertion levels.
- Using heavy equipment to tackle strenuous activities means less risk of injuries.
- Completely eliminates core pipe and stinger bar.

RENTAL PROGRAM



THE EASY ROLLER™ GCL DEPLOYMENT SYSTEM IS AVAILABLE FOR RENTAL EXCLUSIVELY FROM CETCO LINING TECHNOLOGIES GROUP

The equipment can be delivered to any project location in the continental United States and is offered with the following standard components:

- **Easy Roller Attachment** – Compatible with standard three point hitch system available on most late model tractors. Contact us for guidance on tractor suitability.
- **Operation Manual**
- **Heavy Duty Stinger Bar** – Designed specifically to mount on an all-terrain, extendable boom fork lift with a quick connect style attachment system.

ADDITIONAL OPTIONS

- **Wide Track Caterpillar Challenger 55**
- **Start-Up Assistance** – CETCO can provide a qualified technician. On-site training will be offered on the use of the attachment as well as practical installation techniques and productivity strategies.

Monthly, weekly and daily rentals are available. Proof of insurance, valid lease contract, and credit approval are required prior to delivery.

Contact us for a customized cost-benefit analysis, rates and availability.



ph 847.392.5800
800.527.9948

fx 847.577.5566

1500 West Shure Drive | Arlington Heights | Illinois | 60004 | U.S.A.

© 2005 Colloid Environmental Technologies Company

05.05